

# R&S® HMC804x

## Power Supply

### 100 W and 1, 2 or 3 Channels



**Total output power**  
All models: 100W

**Output current per channel**  
R&S®HMC8041: max. 10A  
R&S®HMC8042: max. 5A  
R&S®HMC8043: max. 3A

**EasyArb**  
Create individual V/I curves directly on the device

**FuseLink**  
Combine electronic fuses as required

**EasyRamp**  
Program a startup curve directly on the device

**Sequencing**  
Sequenced start of channels

**Trigger input**  
Start and control EasyArb, et al.

**Analog input**  
Control output channel with external voltage and current


**High energy efficiency**  
Low heat dissipation and quiet fan

**Brilliant Screen**  
QVGA TFT Display with 320 x 240 Pixels

**Data logging**  
To USB flash drive in CSV format

**Protection**  
Overvoltage (OVP) and Overpower protection (OPP) for all outputs

**UI-Tracking**  
Convenient parallel and serial operation

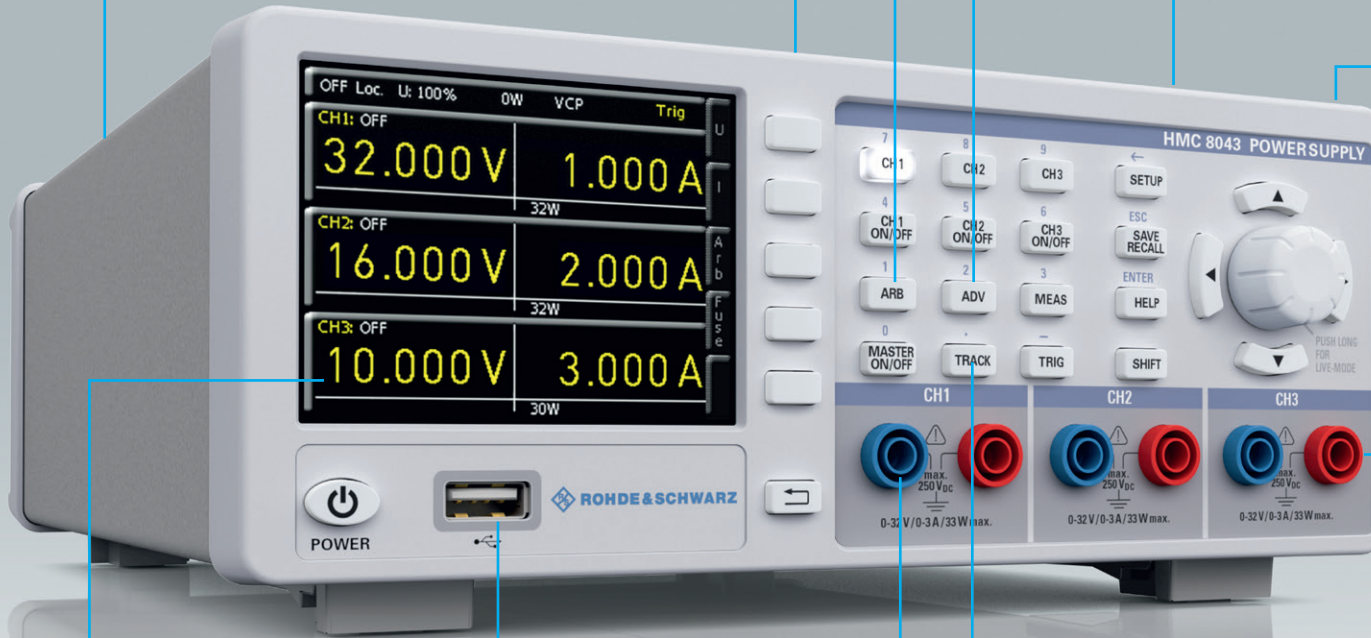

# At a glance

One, two or three channels – R&S®HMC804x power supplies with their specifications and wide range of functions are ideal for use in development labs and industrial environments. Thanks to their high energy efficiency, the linear power supplies remain cool and quiet, even at maximum load. Practical interfaces and connectors allow users to work quickly and conveniently with the R&S®HMC804x, even in 19" racks.

The R&S®HMC804x family consists of three models with a maximum total power of up to 100W and a continuous voltage range from 0V to 32V. The one-channel R&S®HMC8041 delivers a maximum of 10A, the two-channel R&S®HMC8042 a maximum of 5A and the three-channel R&S®HMC8043 a maximum of 3A per channel. The two-channel and three-channel models enable users to connect multiple outputs in parallel or in series to increase the voltage or current. The outputs are galvanically isolated, floating, and protected against overloading and short circuits. Voltage, current and power values are output on a brilliant QVGA display.

The R&S®HMC804x offers a wide range of logging functions, an integrated energy meter and electronic fuses that can be individually combined for each channel, making it ideal for hardware developers, labs and industrial environments. Linear switching power supplies ensure high efficiency, for minimum heat dissipation even at full load. Developers and industrial users benefit from useful functions such as sequenced start of channels, EasyArb and EasyRamp functions that are directly programmable on the device, an analog input for external control of voltage values, an external trigger input for controlling channels and arb steps, and adjustable overvoltage/overpower protection for each channel.



All connectors, including SENSE, are available on the rear panel. A cage clamp facilitates rack installation and deinstallation. The LXI-compliant power supply can be controlled via LAN, USB or an optional GPIB interface. The CDC (virtual COM port) and TMC classes are supported for communications via USB. The remote control commands are based on the SCPI standard.

The R&S®HMC804x power supplies from the Rohde & Schwarz product range offer top quality and intelligent, practical functions at an extremely attractive price.

# Key facts

## Clear display of all measured parameters

- ▮ Brilliant QVGA color display (320 x 240 pixel)
- ▮ Realtime voltage, current and power values
- ▮ High setting and readback resolution: 1 mV and 0.1 mA/1.0 mA (depending on current and model)
- ▮ Low residual ripple due to linear postregulation
- ▮ High energy efficiency, low heat dissipation and quiet fan

## Galvanically isolated, floating and short-circuit-proof outputs

- ▮ Front panel: 4 mm (0.16 in) safety sockets (R&S®HMC8041 including SENSE)
- ▮ Rear panel: WAGO cage clamp for all channels including SENSE
- ▮ Convenient parallel and serial operation via
- ▮ V/I tracking

## Protective functions adjustable for each channel


- ▮ Overvoltage protection (OVP) for all outputs
- ▮ Overpower protection (OPP) for all outputs
- ▮ FuseLink (freely combinable electronic fuses)
- ▮ FuseDelay (fuse activation delay)

## Ideal power supply for hardware developers and labs

- ▮ EasyArb function for user-definable V/I curves
- ▮ EasyRamp for simulating a start-up curve (directly programmable on device)
- ▮ Sequencing (sequenced start of channels)
- ▮ Energy meter (measurement of energy output)
- ▮ Analog input for external control via voltage (0 V to 10 V) and current (4 mA to 20 mA)
- ▮ Trigger input for starting/controlling EasyArb
- ▮ Data logging to USB flash drive in CSV format

## Remote control

- ▮ USB interface (CDC/virtual COM port, TMC)
- ▮ LAN interface, LXI-compliant
- ▮ Optional GPIB interface
- ▮ Remote control via SCPI-based commands

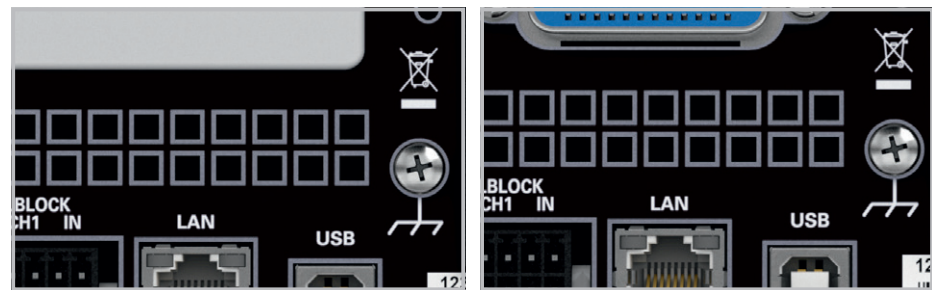

R&S®HMC804x: standard version

R&S®HMC804x-G: GPIB version

| Application                    | How the HAMEG R&S®HMC804x meets your needs   |
|--------------------------------|--|
| Engineering lab                | <ul style="list-style-type: none"> <li>▮ FuseLink (freely combinable electronic fuses)</li> <li>▮ EasyArb function for user-definable V/I curves</li> <li>▮ EasyRamp for simulating a start-up curve (directly programmable on device)</li> <li>▮ Built-in energy meter</li> <li>▮ Data logging to USB flash drive in CSV format</li> </ul>                                |
| Automatic test equipment (ATE) | <ul style="list-style-type: none"> <li>▮ Analog input for external control via voltage (0 V to 10 V) and current (4 mA to 20 mA)</li> <li>▮ Trigger input for starting/controlling EasyArb</li> <li>▮ Sequencing (sequenced start of channels)</li> </ul>  |
| Production environment         | <ul style="list-style-type: none"> <li>▮ Rear connectors for all channels, including SENSE</li> <li>▮ WAGO cage clamp on the rear panel for easy installation and deinstallation</li> <li>▮ Remote control via SCPI-based commands</li> <li>▮ LAN interface, integrated web server, LXI-compliant</li> <li>▮ Optional GPIB interface (R&amp;S®HMC804x-G models)</li> </ul> |

# Ideal for industrial environments



Power supply units in industrial production environments are often found in 19" racks. The R&S®HMC804x series instruments are very suitable for this use as all models can be integrated into 19" racks with the rack mounting kits R&S®HMC95. Two R&S®HMC8043 models built side by side result in 6 channels on 2 rack units. Please ensure sufficient space is available in the rack for adequate cooling (required minimum space above a R&S®HMC804x: 1 rack unit).

Additionally, all front panel connectors plus SENSE lines are located at the back panel of the instrument. In order to facilitate the regular fitting-out for calibration the rear panel connector was designed with a WAGO cage clamp.

| Base unit     | Channels | Power                            | GPIB-Interface |
|---------------|----------|----------------------------------|----------------|
| R&S®HMC8043-G | 3        | 100 W (33 W/Channel, 3 A (max.)) | ✓              |
| R&S®HMC8043   | 3        | 100 W (33 W/Channel, 3 A (max.)) | ✗              |
| R&S®HMC8042-G | 2        | 100 W (50 W/Channel, 5 A (max.)) | ✓              |
| R&S®HMC8042   | 2        | 100 W (50 W/Channel, 5 A (max.)) | ✗              |
| R&S®HMC8041-G | 1        | 100 W (10 A (max.))              | ✓              |
| R&S®HMC8041   | 1        | 100 W (10 A (max.))              | ✗              |

**R&S®HMC8043**  
**R&S®HMC8042**  
**R&S®HMC8041**

**1/2/3 channel power supply**  
 from firmware version 01.104

**Electrical Specifications**

|   |  |
|---|--|
| Total power output  | 100 W                                      |
| Maximum power per channel   |  |
| R&S®HMC8043   | 33 W                                       |
| R&S®HMC8042   | 50 W                                       |
| R&S®HMC8041   | 100 W                                      |
| Voltage output  |  |
| all models  | 0 V to 32 V                                |
| Current output  |  |
| R&S®HMC8043   | max 3 A                                    |
| R&S®HMC8042   | max 5 A                                    |
| R&S®HMC8041   | max 10 A                                   |
| Number of outputs   |  |
| R&S®HMC8043   | 3  |
| R&S®HMC8042   | 2  |
| R&S®HMC8041   | 1  |
| Line & load regulation (SENSE connected)  |  |
| Constant voltage mode   |  |
| R&S®HMC8043   | <0.02% + 3 mV                              |
| R&S®HMC8042 R&S®HMC8041   | <0.03% + 5 mV                              |
| Constant current mode   |  |
| R&S®HMC8043   | <0.03% + 200 µA                            |
| R&S®HMC8042 R&S®HMC8041   | <0.03% + 300 µA                            |
| Voltage ripple 20 Hz to 20 MHz (front connector)<br>(V=16 V, I=I <sub>max</sub> *0.5) |  |
| R&S®HMC8043 R&S®HMC8042   | 450 µV <sub>rms</sub> / 4 mV <sub>pp</sub> |
| R&S®HMC8041   | 1 mV <sub>rms</sub> / 5 mV <sub>pp</sub>   |
| Current ripple 20 Hz to 20 MHz<br>(V=16 V, I=I <sub>max</sub> *0.5)                   |  |
| all models  | typ. <1 mA <sub>rms</sub>                  |
| Response time with SENSE compensation<br>(10% to 90% load change)                     | 1 ms (±20 mV)                              |
| Max SENSE compensation  | 1 V  |
| Programming accuracy (23°C ±5°C)  |  |

|  |  |
|--|--|
| Voltage  |  |
| all models   | <0.05% + 2 mV  |
| Current  |  |
| R&S®HMC8043  | <0.05% + 2 mA<br>typ. <0.05% + 1 mA (I <100 mA)                                      |
| R&S®HMC8042  | <0.1% + 5 mA<br>typ. <0.05% + 2 mA (I <100 mA)                                       |
| R&S®HMC8041  | <0.2% + 10 mA<br>typ. <0.2% + 4 mA (I <100 mA)                                       |
| Readback accuracy (23°C ±5°C)  |  |
| Voltage  |  |
| all models   | <0.05% + 2 mV  |
| Current  |  |
| R&S®HMC8043  | <0.05% + 2 mA<br>typ. <0.05% + 1 mA (I <100 mA)                                      |
| R&S®HMC8042  | <0.05% + 4 mA<br>typ. <0.1% + 2 mA (I <100 mA)                                       |
| R&S®HMC8041  | <0.15% + 10 mA<br>typ. <0.2% + 4 mA (I <100 mA)                                      |
| Resolution   |  |
| Voltage  |  |
| all models   | 1 mV   |
| Current  |  |
| R&S®HMC8043 R&S®HMC8042  | 0.1 mA (I <1 A)<br>1 mA (I >1 A)   |
| R&S®HMC8041  | 0.5 mA (I <1 A)<br>1 mA (I >1 A)   |
| Voltage to earth   | 250 VDC  |
| Reverse voltage  | max. 33 V  |
| Inverse voltage  | max. 0.4 V   |
| Max. current allowed in case of inverse voltage                                    | 3 A  |
| <b>Supplemental characteristics</b>  |  |
| Front connectors   | 4 mm safety sockets  |
| Rear connectors  | Wago male connector (713-1428/037-000),<br>8 x 2-pole, pin spacing 3.5 mm / 0.138 in |
| Temperature coefficient<br>±(% of output + offset) (per K)                         | voltage: <0.02% + 3 mV<br>current: <0.02% + 3 mA                                     |
| Output voltage overshoot during turn-off of AC power with activated channel output | 100 mV   |
| Over temperature protection  | Yes  |

|   |  |
|---|--|
| <b>Voltage programming speed (within 1% of total excursion)</b> |  |
| Positive voltage change   |  |
| no load   | 10 ms + µC-time                                    |
| with resistive load   | 10 ms + µC-time                                    |
| Negative voltage change   |  |
| no load   | 500 ms + µC-time                                   |
| with resistive load   | 10 ms + µC-time                                    |
| Command processing time   | <30 ms   |
| Over Voltage Protection   | Yes  |
| Over Power Protection   | Yes  |
| Energy Meter  | Yes  |
| EasyRamp  | Yes  |
| EasyRamp time   | 10 ms to 10 s                                      |
| <b>Electronic Fuse</b>  |  |
| Fuse trip time  | <10 ms   |
| Fuse linking  | <100 µs + trip time of linked channel              |
| Fuse delay  | 10 ms to 10 s                                      |
| <b>Analog Interface</b>   |  |
| Shunt resistance<br>(4 mA to 20 mA)                             | 250 Ohm  |
| Input resistance 0 V to 10 V                                    | >10 kOhm   |
| Acquisition rate V/I interface                                  | 10 Sa/s  |
| Response time V/I interface                                     | <150 ms  |
| Resolution  | 14 bit   |
| <b>Trigger Input</b>  |  |
| Trigger response time   | <1 ms  |
| Min. trigger interval   | 10 ms  |
| Trigger level   | TTL  |
| Edge direction  | rising, falling                                    |
| <b>Arbitrary (EasyARB)</b>                                      |  |
| Parameter   | Voltage, current, time, interpolation mode (y/n)   |
| Number of Points  | max. 512   |
| Dwell time  | 10 ms to 600 s                                     |
| Repetition rate   | continuous or burst mode with 1 to 255 repetitions |
| Trigger   | manually, interface, trigger input                 |

| Logging                             |  |
|-------------------------------------|--|
| Sampling rate                       | 1000 Sa/s, 100 Sa/s, 10 Sa/s, 1 to 3600 Sa/s               |
| Resolution                          |  |
| R&S®HMC8043                         | 1 mV / 0.1 mA (<100 Sa/s)<br>10 mV / 1 mA (1000 Sa/s)      |
| R&S®HMC8042 /<br>R&S®HMC8041        | 1 mV / 1 mA (<100 Sa/s);<br>10 mV / 10 mA (1000 Sa/s)      |
| Memory                              | Internal or external memory<br>(USB memory sticks)         |
| Maximum number of points            | limited by memory  |
| Output Sequencing                   |  |
| Synchronicity                       | <100 μs  |
| Delay per channel                   | 1 ms to 60 s   |
| Remote Interfaces                   |  |
| Connectors                          | USB-TMC, USB-CDC (Virtual COM), LAN (LXI), GPIB (optional) |
| Miscellaneous                       |  |
| Input power option                  | 100 VAC to 240 VAC (±10%) 50/60 Hz                         |
| Maximum input power                 | 200 W  |
| Fuse                                | T3, 15L 250 V  |
| Operating temperature               | 0°C to +40°C   |
| Storage temperature                 | -20°C to +70°C   |
| Humidity                            | 5% to 80%  |
| Display                             | 3.5" / QVGA  |
| Dimensions (H x W x D)              | 88 x 222 x 280 mm  |
| Rack mount capability<br>(half 19") | Yes  |
| Weight                              | 2.6 kg   |

The specifications are based on a 30 min warm-up period.

#### Accessories included:

Line cord, printed operating manual

Printed operating manual



# Recommended Accessories

## R&S® HZC95

19" rackmount kit  
for R&S®HMC series, 2 HE




## R&S® HZ72

IEEE-488 (GPIB) bus  
interface cable




## R&S® HZ10

5x silicon test lead  
R&S®HZ10S: black, R&S®HZ10R: red, R&S®HZ10B: blue

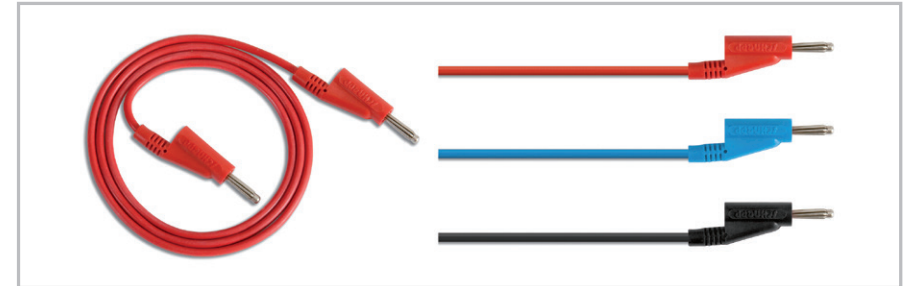



3607016932

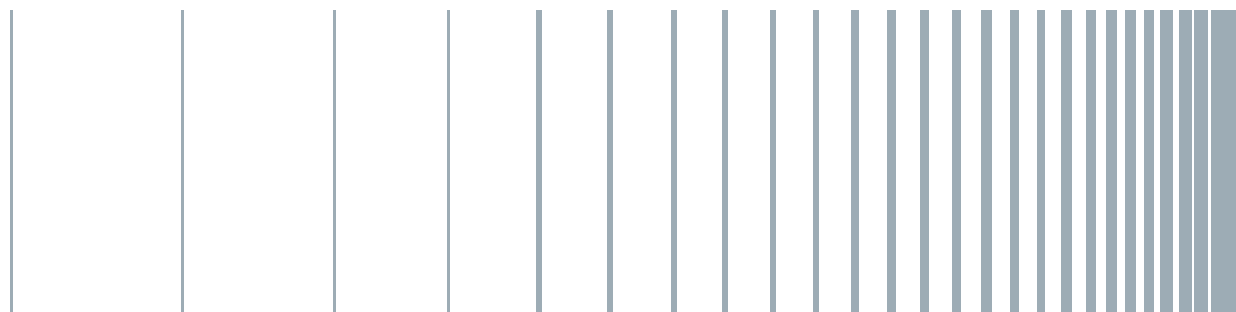

© 2016 Rohde & Schwarz GmbH & Co. KG  
Mühlendorfstr. 15, 81671 München, Germany  
Phone: +49 89 41 29 - 0  
Fax: +49 89 41 29 12 164  
E-mail: [info@rohde-schwarz.com](mailto:info@rohde-schwarz.com)  
Internet: [www.rohde-schwarz.com](http://www.rohde-schwarz.com)  
Subject to change – Data without tolerance limits is not binding.  
R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG.  
Trade names are trademarks of the owners.



# R&S® HMC804x Power Supply

## Compact and easy to use



### The perfect choice for

Engineering lab

Production testing

Education

Maintenance & repair

### Key features

One, two or three channels – the R&S®HMC804x power supplies with their specifications and wide range of functions are ideal for use in development labs and industrial environments. Thanks to their high energy efficiency, the linear power supplies remain cool and quiet, even at maximum load. Practical interfaces and connectors allow users to work quickly and conveniently with the R&S®HMC804x. Convenient functions enable the instruments to be used in special applications.

| Key specifications              | R&S® HMC8041           | R&S® HMC8042 | R&S® HMC8043 |
|---------------------------------|------------------------|--------------|--------------|
| Number of channels              | 1                      | 2            | 3            |
| Max. power per channel          | 100 W                  | 50 W         | 33 W         |
| Total power output              | 100 W                  |              |              |
| Output voltage per channel      | 0 V to 32 V            |              |              |
| Max. output current per channel | 10 A                   | 5 A          | 3 A          |
| Resolution                      | 1 mV/1 mA              |              |              |
| Overvoltage protection          | adjustable per channel |              |              |
| Overcurrent protection          | FuseLink technology    |              |              |
| Arbitrary V/I curves            | EasyArb function       |              |              |

| Your benefit  | Features   |
|---|--|
| Clear display of all measured parameters            | The brilliant color display shows voltage current and power values in real time  |
| Flexible channel configurations for up to 90 volts  | All channels are galvanically isolated and can be combined to drive balanced circuitries or for higher voltages/currents   |
| Flexible overcurrent protection                     | <ul style="list-style-type: none"> <li>FuseLink allows you to freely combine the electronic fuses in each channel</li> <li>A fuse delay can be set to prevent too early switch-off due to a short current spike</li> </ul> |
| Programmable time/voltage or time/current sequences | Arbitrary waveforms can be generated for voltage and current. Function can be configured and executed via control panel or external interface  |
| EasyRamp function                                   | After switching on, voltage will increase practically linear to the set value  |

► For more information, see [www.rohde-schwarz.com/product/HMC804x](http://www.rohde-schwarz.com/product/HMC804x)

## Ideal for industrial environments



Power supply units in industrial production are often found in 19" racks. All R&S®HMC804x models can be integrated into 19" racks with the R&S®HZC95 rackmounting kits.

## WAGO cage clamp



To facilitate typical calibration setups, the rear panel connector was designed with a WAGO cage clamp.

## Ordering information

| Base units    |         |                                |      |
|---------------|---------|--------------------------------|------|
| Model         | Channel | Power                          | GPIB |
| R&S®HMC8041   | 1       | 100 W (max. 10 A)              | No   |
| R&S®HMC8041-G | 1       |                                | Yes  |
| R&S®HMC8042   | 2       | 100 W (50 W/channel, max. 5 A) | No   |
| R&S®HMC8042-G | 2       |                                | Yes  |
| R&S®HMC8043   | 3       | 100 W (33 W/channel, max. 3 A) | No   |
| R&S®HMC8043-G | 3       |                                | Yes  |

## System component

| Description             | Type      |
|-------------------------|-----------|
| 19" rackmount kit, 2 HU | R&S®HZC95 |

### Included accessories:

All models include operating manual, power cable and three-year warranty.

## Electronic fuses, overvoltage protection

Overcurrent/overvoltage protection can be set for each channel individually. The electronic fuses can be linked to other channels. In this case, all linked channels will be switched off as soon as one reaches a limit. Even the delay time can be set to prevent premature switch-off due to short current spikes.

## EasyArb

EasyArb is the time/current flow or time/voltage curve that is freely programmable by channel, with up to 512 points. Programming is possible via remote software or directly on the instrument.

## EasyRamp function

Sometimes test sequences should avoid the abrupt rise of the supply voltage. The EasyRamp function allows users to simulate a startup curve. After the channels are switched on, the increase in output voltage will be practically linear to the set voltage value within a defined time span.

## Sequencing function

The R&S®HMC804x power supply includes a sequencing function that can be adjusted via a menu. Sequencing enables you to automatically and consecutively connect available channels to the device under test, with adjustable time offsets when the MASTER ON/OFF key is activated.

Rohde & Schwarz Representative

### Rohde & Schwarz GmbH & Co. KG

Europe, Africa, Middle East | +49 89 4129 12345  
 North America | 1 888 TEST RSA (1 888 837 87 72)  
 Latin America | +1 410 910 79 88  
 Asia Pacific | +65 65 13 04 88  
 China | +86 800 810 82 28 | +86 400 650 58 96  
 www.rohde-schwarz.com  
 customersupport@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG  
 PD 5214.9373.32 | Version 01.00 | July 2017 (ks)  
 Trade names are trademarks of the owners  
 The R&S®HMC804x Power Supply  
 Data without tolerance limits is not binding | Subject to change  
 © 2017 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany